




COLOUR CODE: M8810 Brown	LENS MATERIAL: Polycarbonate
LENS TREATMENT: Mi Gold Mir	LENS SIZE: Snow Goggle 180-110-6/4D-1.5 Tor

EUROPEAN STANDARD EN 1836:2005 + A1:2007				AUSTRALIAN / NEW ZEALAND STANDARD AS/NZS 1067.1:2016			
	CENTER	TOP	BOTTOM		CENTER	TOP	BOTTOM
Luminous Transmittance - D65 (380-780nm)	15,05%			Luminous Transmittance - D65 (380-780nm)	15,05%		
Filter Category	3			Filter Category	3		
Description	Dark tint			Description	Sunglasses		
UV Transmittance (280-380nm)	0,0%			UV Transmittance (280-400nm)	0,0%		
UVA Transmittance (315-380nm)	0,0%			UVA Transmittance (315-400nm)	0,0%		
UVB Transmittance (280-315nm)	0,0%			UVB Transmittance (280-315nm)	0,0%		
Max Spectral Trans (280-315nm)	PASS			Max Spectral Trans (280-315nm)	PASS		
Max Spectral Trans (315-350nm)	PASS						
Max Solar UVA Trans (315-380nm)	PASS			Max Solar UVA Trans (315-400nm)	PASS		
Spectral Transmittance (500-650nm)	PASS			Spectral Transmittance (475-650nm)	PASS		
Solar Blue Light Transmittance (380-500nm)	10,19%			Solar Blue Light Transmittance (380-500nm)	10,19%		
Recognition of signal lights and colours				Recognition of signal lights and colours			
Q Red	PASS			Q Red	PASS		
Q Yellow	PASS			Q Yellow	PASS		
Q Green	PASS			Q Green	PASS		
Q Blue	PASS			Q Blue	PASS		


WARNING:

AMERICAN NATIONAL STANDARD - ANSI Z80.3-2015

	CENTER	TOP	BOTTOM
Illuminant C Transmittance (380-780nm)	15,07%		
Primary function:	General Purpose Lens or Shield, medium to dark		
Use:	High and prolonged exposure		
Average UVB (280-315nm)	PASS		
Average UVA (315-380nm)	PASS		
Spectral Transmittance (475-650nm)	PASS		
Solar Blue Light Transmittance (380-500nm)	10,19%		
Traffic Signals Transmittance			
Red signal transmittance	PASS		
Yellow signal transmittance	PASS		
Green signal transmittance	PASS		
Color Distortion			
D65	PASS		
Yellow	PASS		
Green	PASS		

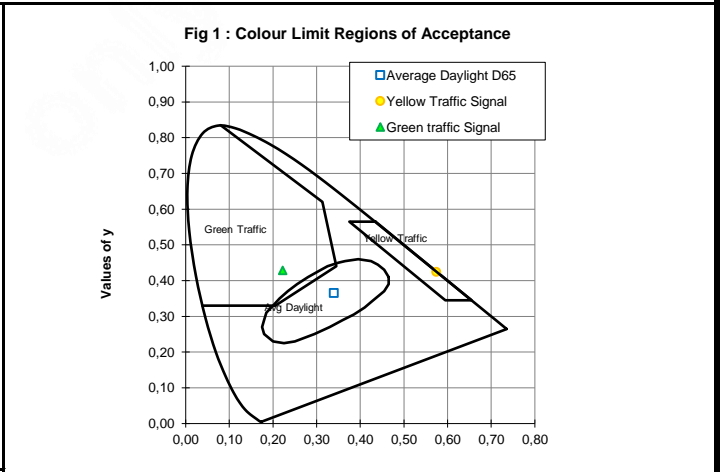

WARNING:

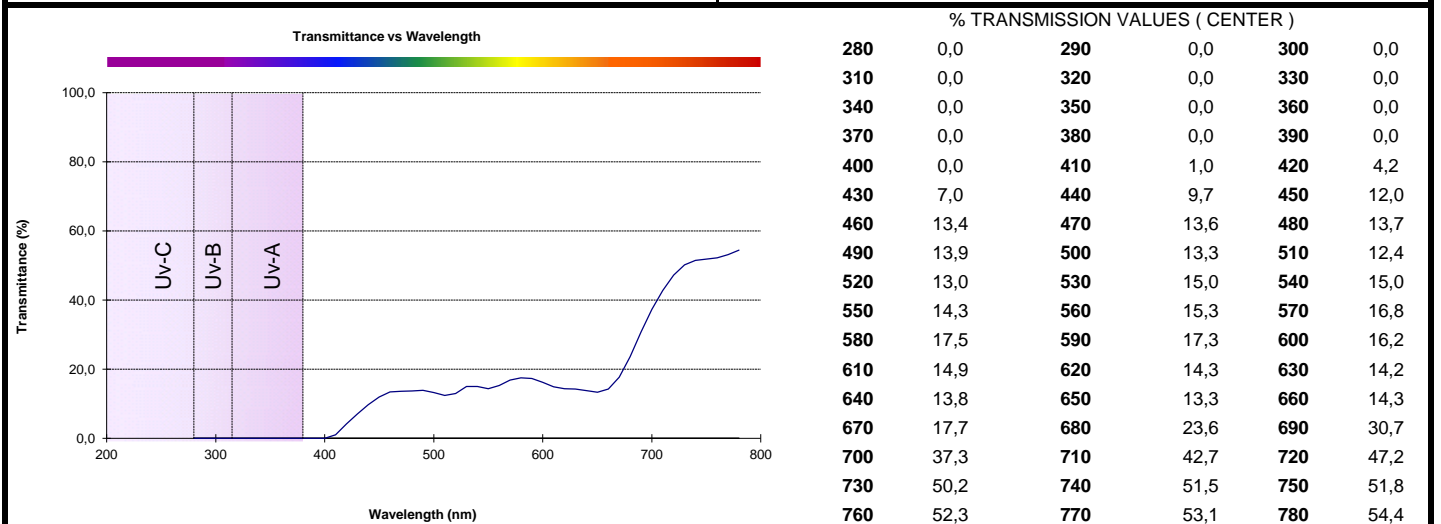

Notes: Reference point --> Geometrical centre